

UpTime Racks ECC13

Shrink the Data Center Footprint into a Cabinet

UpTime Racks ECC13 provides all the critical data center infrastructure into a standard 19" computer cabinet, efficiently cooling the IT network while giving you the flexibility to move the data center to any environment.



COOLING


- 13,000 Btu/hr (3.8 kW) Cooling Capacity
- Cold Aisle / Hot Aisle Airflow Pattern
- Operates Down to 65 °F
- Highly Efficient: Cools Only the Space in Front of the Servers
- Ideal cooling solution for almost any IT environment:
 - Small server Room
 - Large Data Center
 - Open Office Space
- Cooling powered by **MOVINCOOL**.

Monitoring

- Monitoring operates on any WiFi network
- Email alerts when the temperature exceeds alarm set points
- Daily status email provides high, low, and average temperatures

Back-up IT & Cooling Power

- IT equipment & air conditioner powered by UPS during power outages
- Back-up battery time for A/C matches battery time for IT equipment
- Perforated doors to allow outside ambient air to cool IT equipment

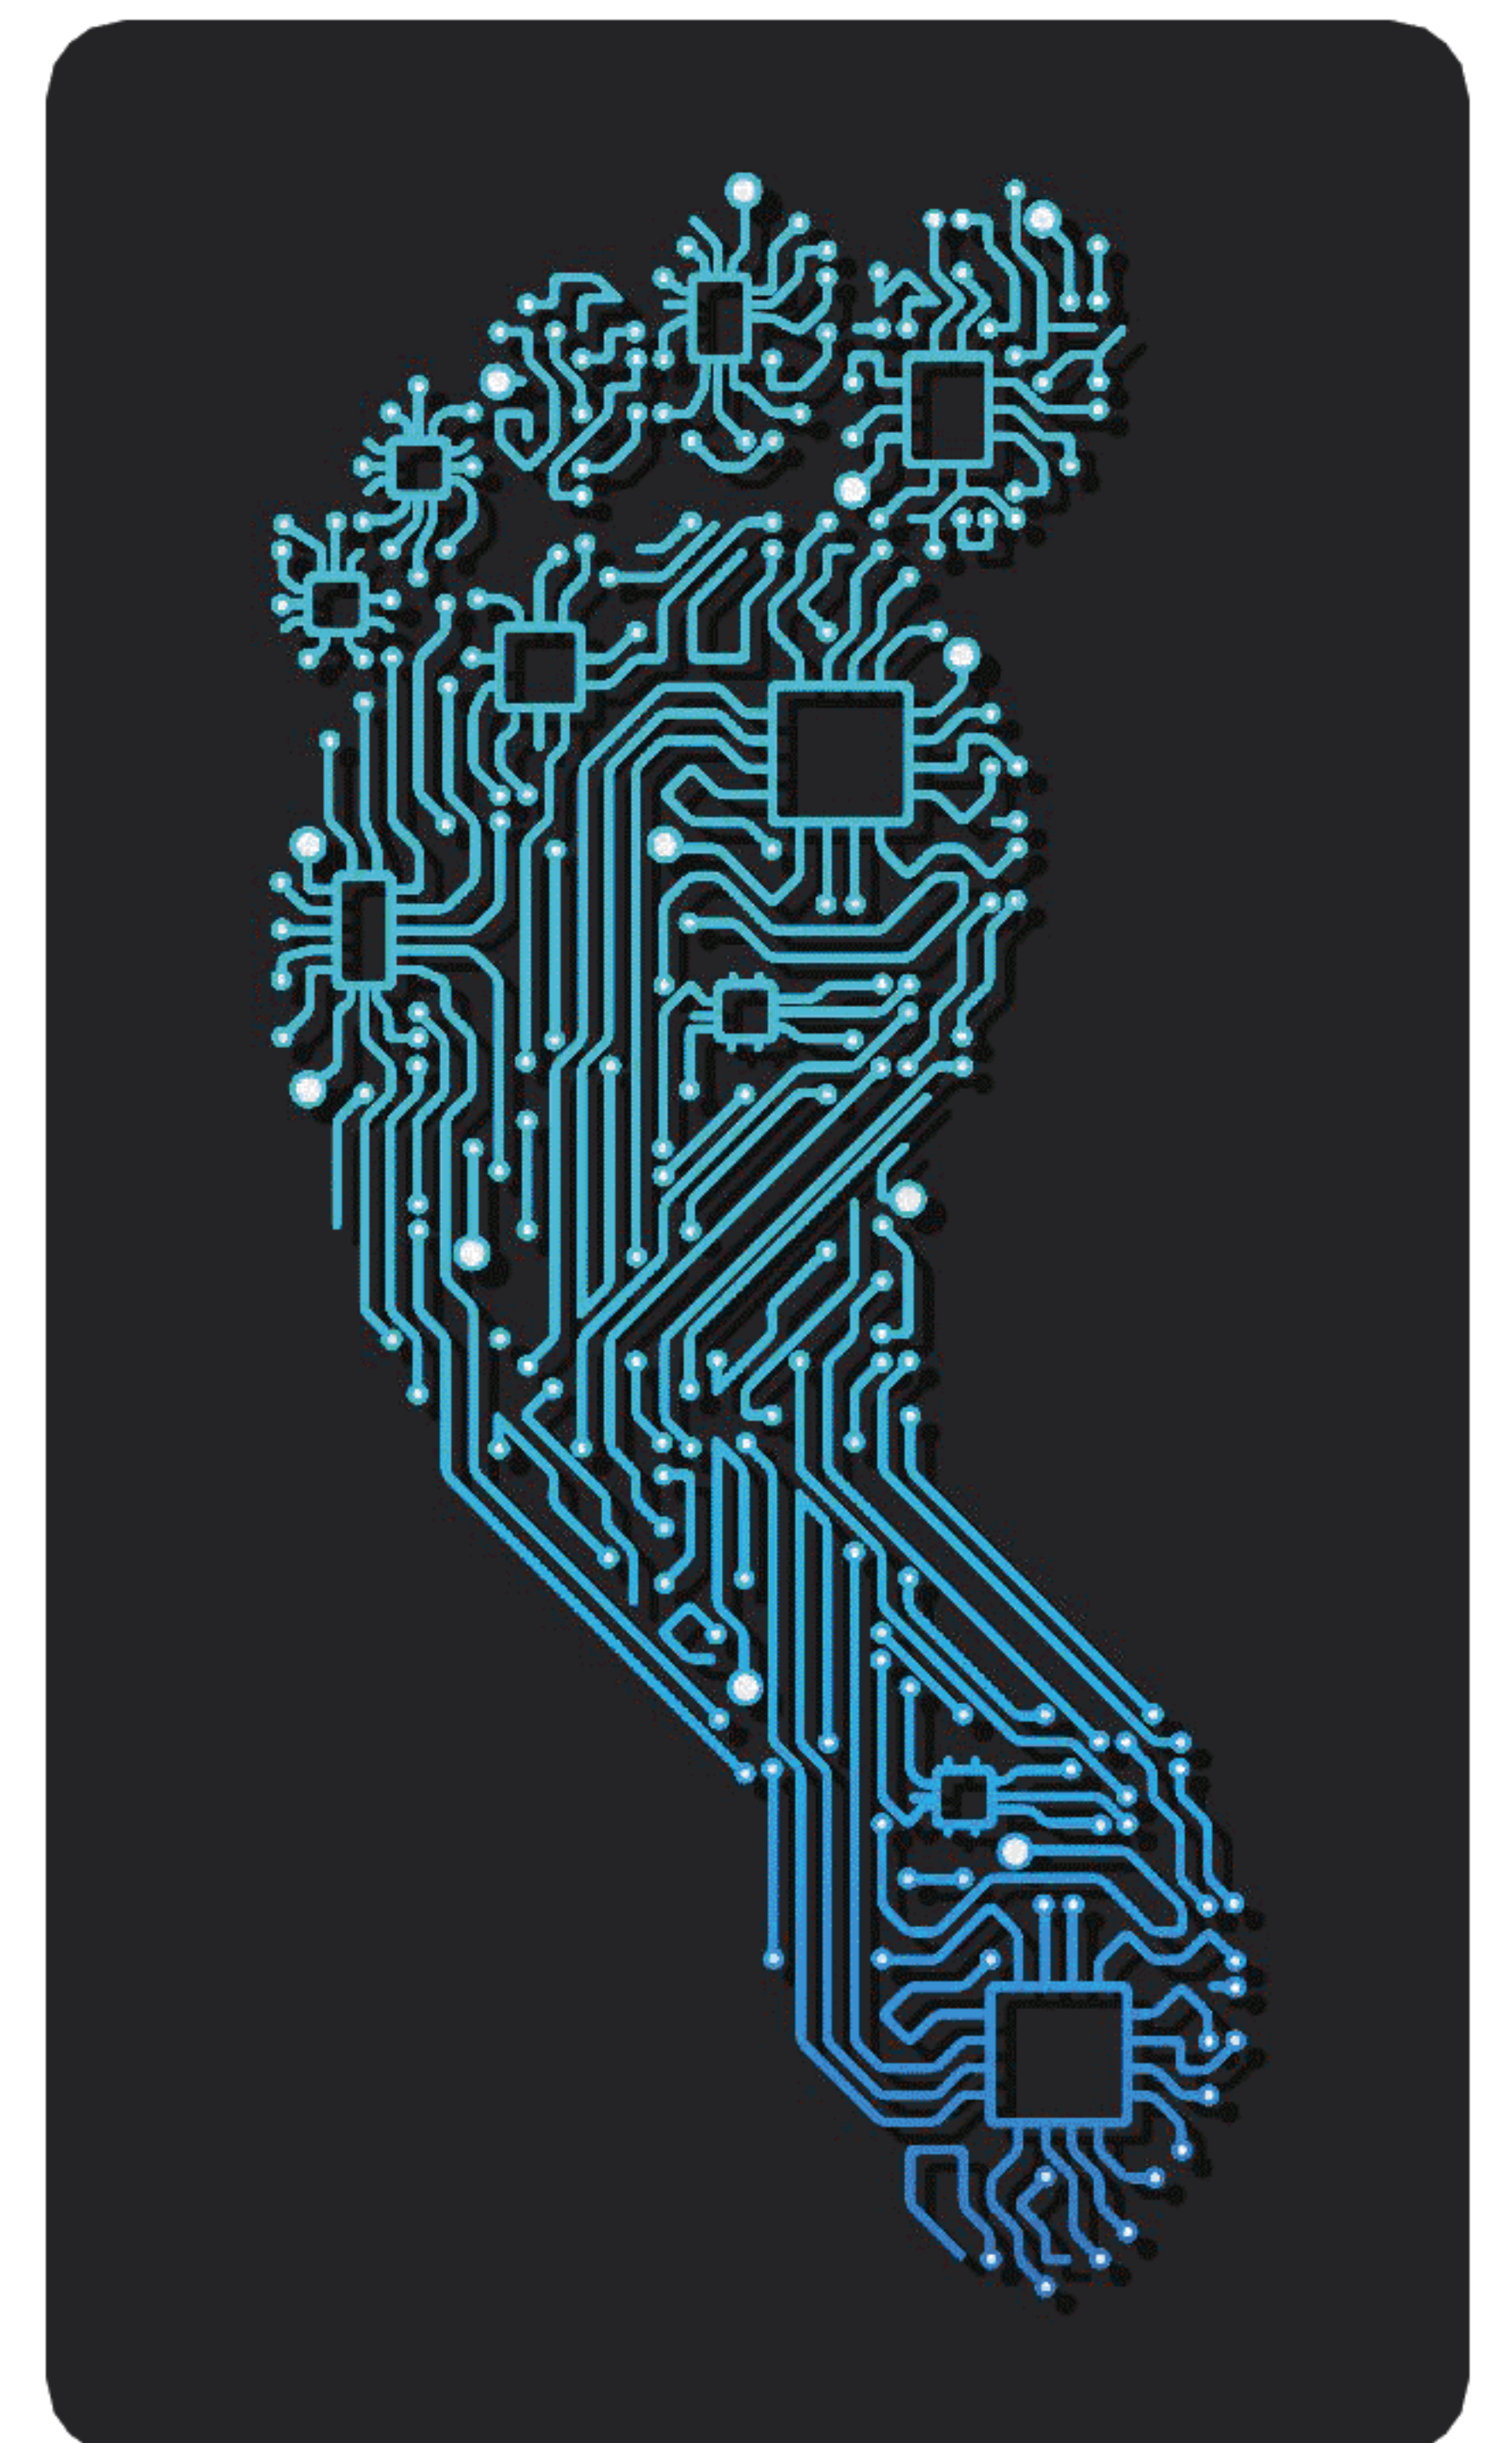

For more information on UpTime Racks ECC13 air conditioned computer cabinet, please visit our website at www.uptimeracks.com, or call at 877-908-8043.



Mission Critical IT Environments



Every company has mission critical IT equipment where downtime results in lost sales, server replacements, and decreased employee productivity. Mission critical IT equipment can be housed anywhere from a small server room to a large data center, and the UpTime Racks ECC13 simplifies the build-out of the data center.

UPTIME RACKS ECC13

- 13,000 Btu/hr (3.8 kW) Cooling Capacity
- Highly economical and efficient way to support critical IT networks
- Plug-and-Play Installation: Reduces cost
- Operates on standard 115 V power
- Easy Mobility: Wheel-mounted cabinet
- ETL Listed air conditioner
- Full size computer cabinet: 32U of available rack space
- 19" EIA-310 standard hole spacing
- Heavy duty welded steel cabinet construction
- Automatic restart function for power outages
- High Quality Construction: Uptime Racks & MovinCool Partnership
- Secure IT Network: Front and back locked cabinet doors
- Cabinet moves from building to building: Not a leasehold improvement
- Condensate pump comes standard to remove moisture from the air
- Controls proper humidity levels and maintains proper Indoor Air Quality

For more information on UpTime Racks ECC13 air conditioned computer cabinet, please visit our website at www.uptimeracks.com, or call at 877-908-8043.

